
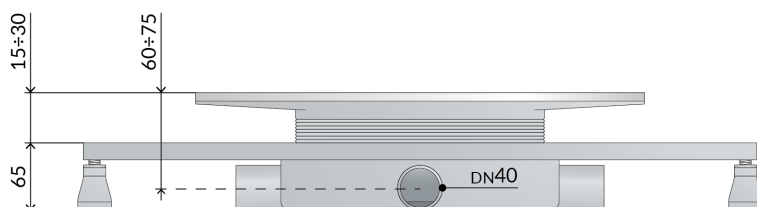


5963.573.8

ABS channel for built-in shower

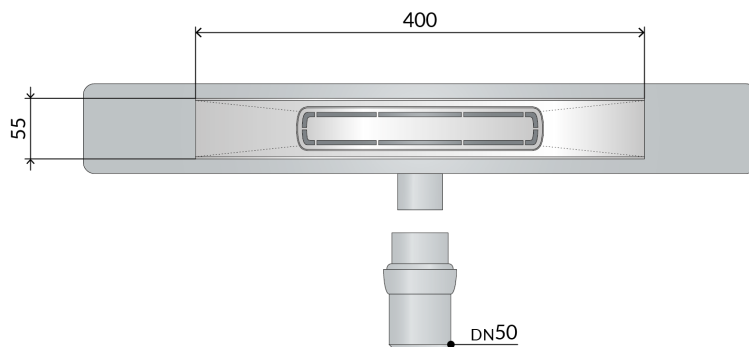

1. AISI 316 stainless steel grid L. 400
2. grid model Frame
3. perimeter waterproofing of the drain
4. with dry trap (removable)
5. adjustable supports to ease the installation
6. ABS lateral outlet DN40
7. two additional outlets
8. ABS jointed tailpiece DN50
9. tiling thickness 15÷30
10. room under floor H. 65

- [for more informations...](#)

Details

Name	Emyflow dry trap
Misura-HM	65
Misura-HT	15÷30
Water volume	32
Measure	L.400×DN40/50