


# 943.574.8.C

## ABS channel for built-in shower

1. grid L. 400
2. AISI 316 stainless steel grid model Line
3. grid covering plastic frame
4. perimeter waterproofing of the drain
5. with dry trap (removable)
6. dry-spot, drainage point for the water filtered through the flooring
7. ABS lateral outlet DN50
8. tiling thickness 15
9. room under floor H. 70

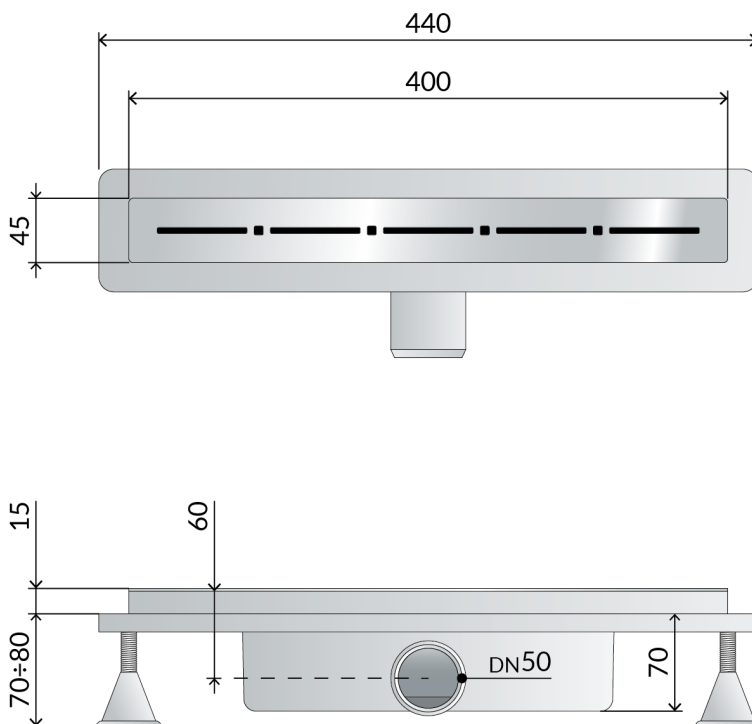

### Details

<b>Name</b>	Basicflow dry trap
<b>Measure</b>	L.400×DN50
<b>Water volume</b>	39
<b>Misura-HM</b>	70
<b>Misura-HT</b>	15