
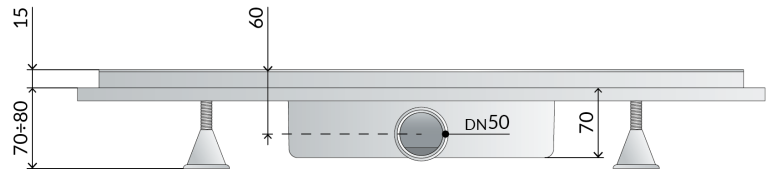


943.804.8.C

ABS channel for built-in shower

1. grid L. 600
2. AISI 316 stainless steel grid model Line
3. grid covering plastic frame
4. perimeter waterproofing of the drain
5. removable trap for cleaning
6. dry-spot, drainage point for the water filtered through the flooring
7. ABS lateral outlet DN50
8. tiling thickness 15
9. room under floor H. 70

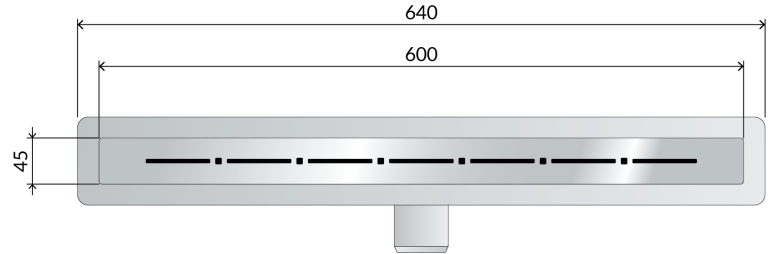

Details

Name	Basicflow
Measure	L.600×DN50
Water seal	35
Water volume	39
Misura-HM	70
Misura-HT	15